

# Techseal<sup>®</sup> Silver SL G

## Zinc flake technology from Atotech



General metal finishing


Zinc flake technology

www.atotech.com

## Silver top coat combining best protection with chemical resistance

### Zinc flake coating systems

Zinc flake technology provides a high grade of corrosion protection using combinations of specialized base and top coats. Largely embraced by the fastener industry, such coatings find widespread use within a variety of applications: ranging from fasteners, hose clamps, clips or brake components for the automotive industry, special fasteners in the wind power, construction and other industries. Atotech offers a comprehensive range of processes including silver and black finishes for different application areas. The coatings are completely Cr(VI)-free and fulfill global automotive performance requirements.

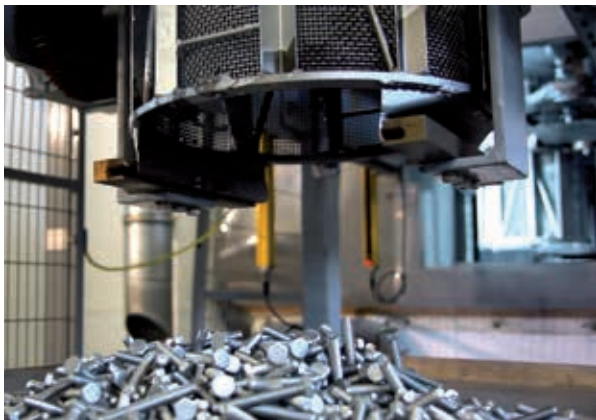

### Corrosion resistance

Base coat	Top coat	Durability
8 µm	4 µm	1,000 h*
10 µm	4 µm	1,500 h*
15 µm	4 µm	2,000 h*
8 µm	4 µm	48 cycles**

Corrosion resistance acc. to \*ISO 9227 / \*\*GMW 14872 and layer thickness may vary depending on part geometry, substrate and application method.

### Features and benefits

- Organic silver top coat
- Fulfills GMW 3359 specification
- Excellent corrosion protection
- Very good adhesion
- Attractive uniform appearance
- Solvent-based
- Very good chemical resistance
- Integrated lubricant
- No hydrogen embrittlement
- Free of harmful heavy metals such as Cr(VI), cadmium, cobalt, lead or nickel

# Techseal<sup>®</sup> Silver SL G

## Organic silver top coat

### Application

---

- Dip-spin
- Dip-drain
- Spray

### Parts (application)

---

- Fasteners
- Chassis parts
- Stamping parts
- Springs
- Clips

### Coefficient of friction

---

- 0.10 – 0.16 ( $\mu_{\text{tot}}$ ) acc. to GM
- Fulfilling +/- 3 Sigma acc. to GM

### Corrosion performance



Start

### Combinations

---

- Combinable with Zintek<sup>®</sup> base coats
- Combinable with electroplated and passivated finishes

### Application parameters

---

- Application viscosity: 35 – 50 sec
- Curing time: 10 – 40 min
- Curing temperature: 180 – 220 °C
- Recommended 20 min at 210 °C object temperature

### Technical data

---

- Delivery density: 1.02 – 1.10 g/cm<sup>3</sup> (at 23 °C)
- Stability in sealed drums: 24 months
- Theoretical coverage rate: 25 m<sup>2</sup>/kg (based on 10 µm dry film)



1,000 h\*

Atotech Group  
Untergasse 47  
65468 Trebur-Geinsheim  
+49 6147 50130  
info@atotech.com

